



LED LINEA LIGHT



SPECIFICATION

- SMD LED
- Aluminum Extruded Profile
- Constant Current LED Driver
- Best in Class SMD LED For Better High Output And Efficiency
- Opal Diffuser

LED DETAILS


- Make :- **BRIDGELUX** **EDISON**

LED DRIVER DETAIL

- Make:- **OSRAM**


APPLICATION

- Commercial
- Residential
- Retail
- Mall Management




1209mm

LS-LINEA-1714




1209mm

LS-LINEA-1808



1209mm


LS-LINEA-1818



1209mm


Cut Out:- 1209mm x 18mm

LS-LINEA-2214



1209mm

LS-LINEA-2518



Model No	Voltage	CCT	Beam Angle	CRI	Wattage	System Efficacy
LS-LINEA-1714	AC 220-240V	3000K/4000K/5700K	120°	80	15W	100lm/W
LS-LINEA-1808	AC 220-240V	3000K/4000K/5700K	120°	80	15W	100lm/W
LS-LINEA-1818	AC 220-240V	3000K/4000K/5700K	120°	80	15W	100lm/W
LS-LINEA-2214	AC 220-240V	3000K/4000K/5700K	120°	80	15W	100lm/W
LS-LINEA-2518	AC 220-240V	3000K/4000K/5700K	120°	80	15W	100lm/W



SPECIFICATION

- SMD LED
- Aluminum Extruded Profile
- Constant Current LED Driver
- Best in Class SMD LED For Better High Output And Efficiency
- Opal Diffuser / GR OPTICS LENS

LED DETAILS


- Make :- **BRIDGELUX** **EDISON**

LED DRIVER DETAIL

- Make:- **OSRAM**

APPLICATION


- Commercial
- Residential
- Retail
- Mall Management



Size

Code	L	W	H
LS-LINEA-2225	1209mm	22mm	25mm
LS-LINEA-2225-LDA	1158mm	22mm	25mm

Model No	Voltage	CCT	Beam Angle	CRI	Wattage	System Efficacy
LS-LINEA-2225	AC 220-240V	3000K/4000K/5700K	120°	80	15W	100lm/W
LS-LINEA-2225-LDA	AC 220-240V	3000K/4000K/5700K	30°/60°	80	30W	100lm/W

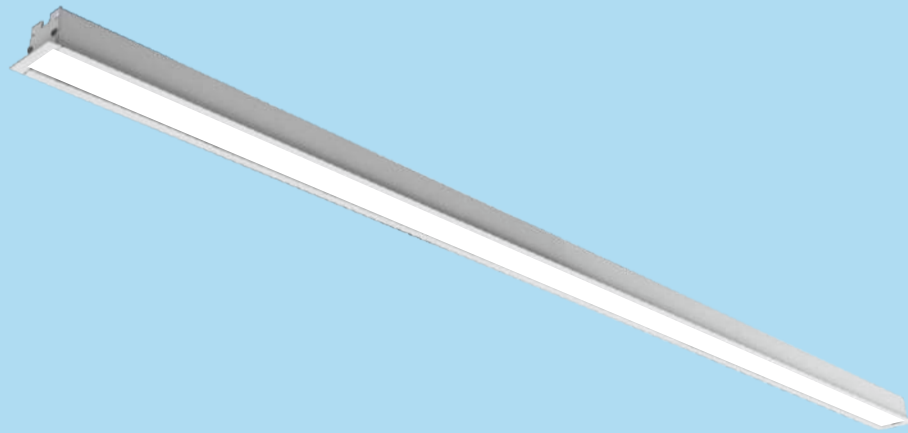

SPECIFICATION

- SMD LED
- Aluminum Extruded Profile
- Constant Current LED Driver
- Best in Class SMD LED For Better High Output And Efficiency
- Opal Diffuser / GR OPTICS LENS / SHINLAND LENS & Wallwasher

LED DETAILS

- Make :- BRIDGELUX EDISON

LED DRIVER DETAIL

- Make:- OSRAM


APPLICATION

- Commercial, Residential, Retail, Mall Management



Size

Code	L	W	H	Cut-Out
LS-LINEA-4832	1223mm	48mm	32mm	1209mm x 35mm
LS-LINEA-4832-LDA	1209mm	48mm	32mm	1195mm x 35mm
LS-LINEA-4832-WW	1209mm	48mm	32mm	1195mm x 35mm
LS-LINEA-4832-SL-LDA	1220mm	48mm	32mm	1206mm x 35mm
LS-LINEA-4832-SL-WW	1220mm	48mm	32mm	1206mm x 35mm
LS-LINEA-4832-GR-LDA	1194mm	48mm	32mm	1180mm x 35mm



Dimension	Material	Chips	Typ.FWHM
L:132.5 W:30 H:23.6	PC	3030	15°/30°/45°
Dimension	Material	Chips	Typ.FWHM
L:132.5 W:30 H:26.9	PC	3030	Wallwasher



SL-RF-AE-150A

Dimension	Material	Chips	Typ.FWHM
L:150 W:30 H:21.15	Vacuum Aluminum Plating PC	3030	Wallwasher
Dimension	Material	Chips	Typ.FWHM
L:150 W:30 H:21.15	Vacuum Aluminum Plating PC	3030	48°




XTD30-1176-R-50-A

Dimension	Material	Chips	Typ.FWHM
L:1176xW30xH20	PC + UV	3030	50°



XTD30-1176-R-50x50

Dimension	Material	Chips	Typ.FWHM
L:1176xW30xH20	PC + UV	3030	50°x50°



XTD30-1176-R-50-B


Dimension	Material	Chips	Typ.FWHM
L:1176xW30xH20	PC + UV	3030	50°



XTD30-1176-R-35x75

Dimension	Material	Chips	Typ.FWHM
L:1176xW30xH20	PC + UV	3030	35°x75°

Model No	Voltage	CCT	Beam Angle	CRI	Wattage	System Efficacy
LS-LINEA-4832	AC 220-240V	3000K/4000K/5700K	120°	80	20W	100lm/W
LS-LINEA-4832-LDA	AC 220-240V	3000K/4000K/5700K	15°/30°/45°	80	18W	100lm/W
LS-LINEA-4832-WW	AC 220-240V	3000K/4000K/5700K	Wallwasher	80	20W	100lm/W
LS-LINEA-4832-SL-LDA	AC 220-240V	3000K/4000K/5700K	48°	80	18W	100lm/W
LS-LINEA-4832-SL-WW	AC 220-240V	3000K/4000K/5700K	Wallwasher	80	20W	100lm/W
LS-LINEA-4832-GR-LDA	AC 220-240V	3000K/4000K/5700K	50°	80	18W	100lm/W

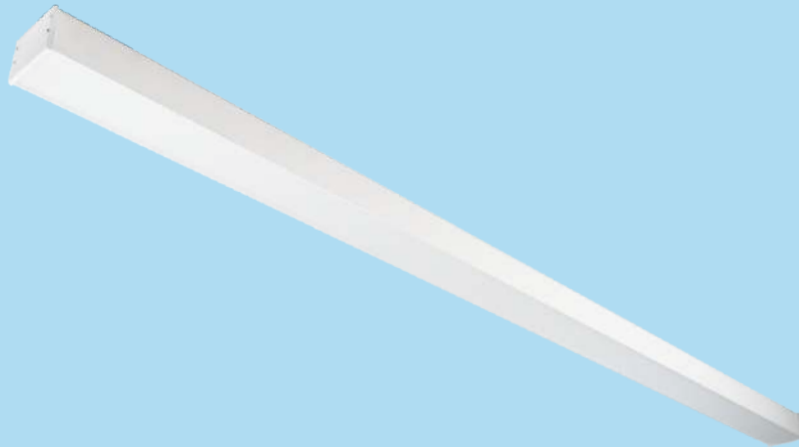

SPECIFICATION

- SMD LED
- Aluminum Extruded Profile
- Constant Current LED Driver
- Best in Class SMD LED For Better High Output And Efficiency
- Opal Diffuser

LED DETAILS


- Make :- **BRIDGELUX** **EDISON**

LED DRIVER DETAIL

- Make:- **OSRAM**

APPLICATION



- Commercial
- Residential
- Retail
- Mall Management




Size

Code	L	W	H
LS-LINEA-5235	1209mm	52mm	35mm

Model No	Voltage	CCT	Beam Angle	CRI	Wattage	System Efficacy
LS-LINEA-5235	AC 220-240V	3000K/4000K/5700K	120°	80	28W	100lm/W

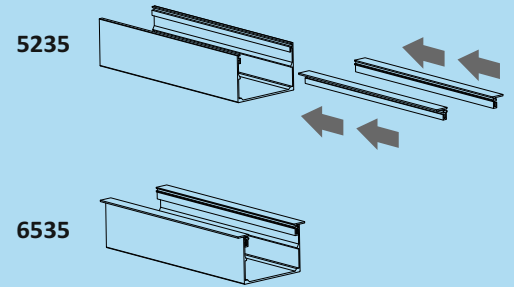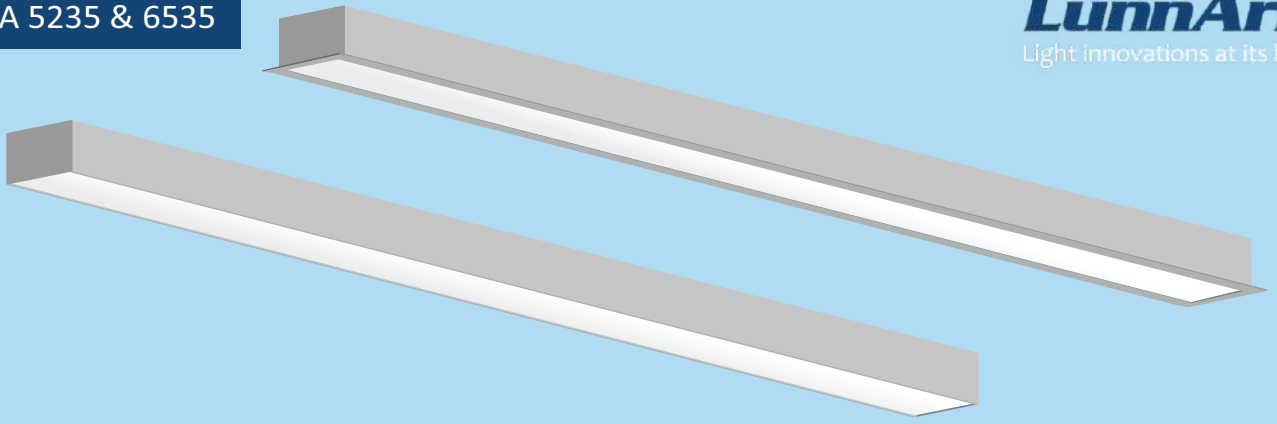


Special Color

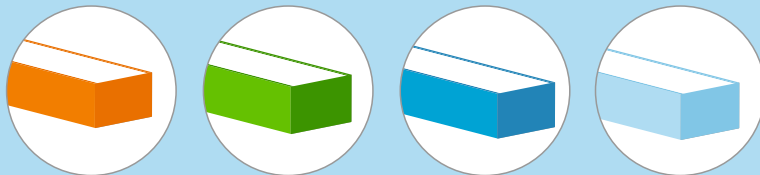

Orange Green Blue Sky Blue


Normal Color

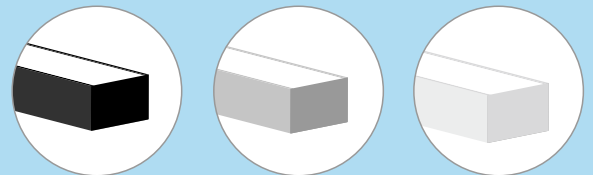

Black Gray White


- Aluminum Extrusion 5235 / 6535 (Slider)
- 1.2mm Sliding Diffuser Mitsubishi
- 6.5mm 28 Micron 1200mm PCB
- Powder Coating :- KRIP ON
- GLS-SPA BIS Approved Isolated driver
- Eng-grade Plastic Sc ew-less Endcap
- Plastic Single pac aging
- Plastic 3ply Inner Single pc
- 7ply - Master
- Steel Mounting Clamp

- Delivery Free of Cost any where in India :- MOQ 480pcs
- Warranty :- 3 Years for Driver (Vasai Location)




Accessories Included :-


- Branding Only For BIS Approved Customer
- Special Color - ₹30/- Extra (Orange, Green, Blue, Sky Blue, Etc.)
- MOQ :- 3000pcs (One Quarter / 3 Month)
- * Taxes Extra




6535 Recessed Trim




Trimless C-Clamp



SS Mounting Clamp



Single PCB



Double PCB



SPECIFICATION

- SMD LED
- Aluminum Extruded Profile
- Constant Current LED Driver
- Best in Class SMD LED For Better High Output And Efficiency
- Opal Diffuser

LED DETAILS


- Make :- **BRIDGELUX** **EDISON**

LED DRIVER DETAIL

- Make:- **OSRAM**

APPLICATION


- Commercial
- Residential
- Retail
- Mall Management



Size

Code	L	W	H	Cut-Out
LS-LINEA-6535	1209mm	65mm	35mm	1209mm x 52mm

Model No	Voltage	CCT	Beam Angle	CRI	Wattage	System Efficacy
LS-LINEA-6535	AC 220-240V	3000K/4000K/5700K	120°	80	28W	100lm/W

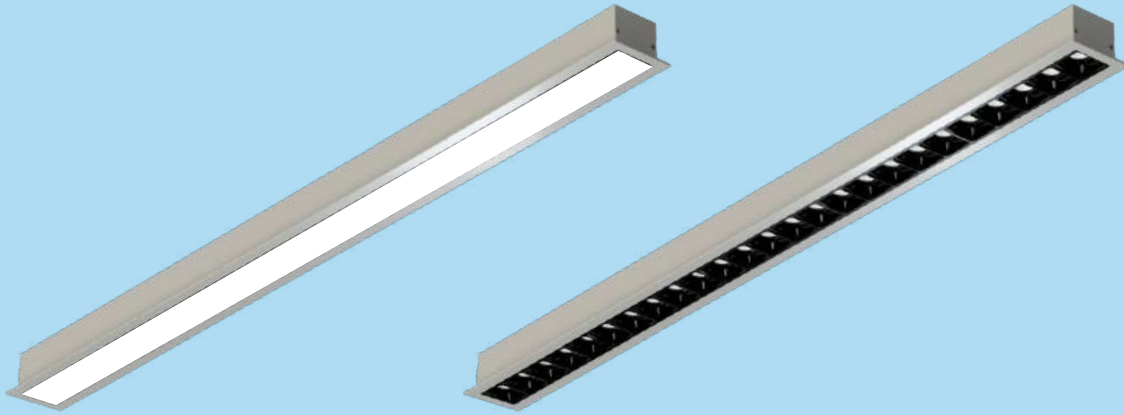

SPECIFICATION

- SMD LED
- Aluminum Extruded Profile
- Constant Current LED Driver
- Best in Class SMD LED For Better High Output And Efficiency
- Opal Diffuser

LED DETAILS


- Make :- **BRIDGELUX** **EDISON**

LED DRIVER DETAIL

- Make:- **OSRAM**

APPLICATION


- Commercial
- Residential
- Retail
- Mall Management



Size

Code	L	W	H	
LS-LINEA-6547	1220mm	65mm	47mm	1209mm x 55mm
LS-LINEA-6547-LDA	1197mm	65mm	47mm	1186mm x 55mm

Model No	Voltage	CCT	Beam Angle	CRI	Wattage	System Efficacy
LS-LINEA-6547	AC 220-240V	3000K/4000K/5700K	120°	80	28W	100lm/W
LS-LINEA-6547-LDA	AC 220-240V	3000K/4000K/5700K	30°/60°	80	18W	100lm/W

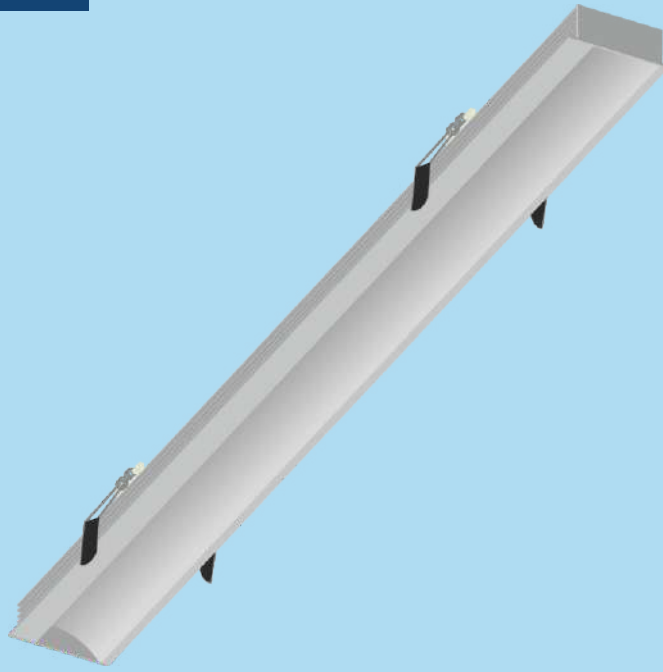

SPECIFICATION

- SMD LED
- Aluminum Extruded Profile
- Constant Current LED Driver
- Best in Class SMD LED For Better High Output And Efficiency
- Opal Diffuser

LED DETAILS


- Make :- **BRIDGELUX** **EDISON**

LED DRIVER DETAIL

- Make:- **OSRAM**

APPLICATION

- Commercial
- Residential
- Retail
- Mall Management



Size

Code	L	W	H	Cut-Out
LS-LINEA-7526	1209mm	75mm	26mm	1209mm x 64mm

Model No	Voltage	CCT	Beam Angle	CRI	Wattage	System Efficacy
LS-LINEA-7526	AC 220-240V	3000K/4000K/5700K	Wallwasher	80	28W	100lm/W



SPECIFICATION

- SMD LED
- Aluminum Extruded Profile
- Constant Current LED Driver
- Best in Class SMD LED For Better High Output And Efficiency
- Opal Diffuser

LED DETAILS


- Make :- **BRIDGELUX** **EDISON**

LED DRIVER DETAIL

- Make:- **OSRAM**

APPLICATION

- Commercial
- Residential
- Retail
- Mall Management



Size

Code	L	W	H	Cut-Out
LS-LINEA-10035	1209mm	100mm	35mm	1209mm x 75mm

Model No	Voltage	CCT	Beam Angle	CRI	Wattage	System Efficacy
LS-LINEA-10035	AC 220-240V	3000K/4000K/5700K	120°	80	40W	100lm/W



SPECIFICATION

- SMD LED
- Aluminum Extruded Profile
- Constant Current LED Driver
- Best in Class SMD LED For Better High Output And Efficiency
- Opal Diffuser

LED DETAILS


- Make :- **BRIDGELUX** **EDISON**

LED DRIVER DETAIL

- Make:- **OSRAM**

APPLICATION


- Commercial
- Residential
- Retail
- Mall Management



Size

Code	L	W	H	Cut-Out
LS-LINEA-12045	1209mm	120mm	45mm	1209mm x 100mm

Model No	Voltage	CCT	Beam Angle	CRI	Wattage	System Efficacy
LS-LINEA-12045	AC 220-240V	3000K/4000K/5700K	120°	80	40W	100lm/W

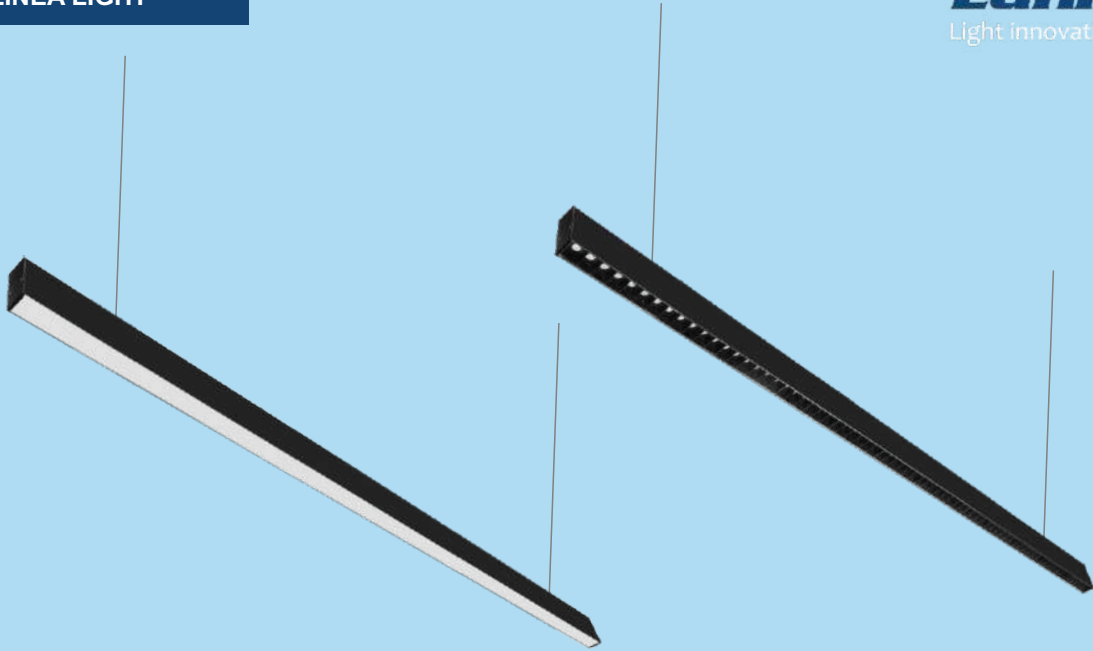

SPECIFICATION

- SMD LED
- Aluminum Extruded Profile
- Constant Current LED Driver
- Best in Class SMD LED For Better High Output And Efficiency
- Opal Diffuser / GR OPTICS LENS

LED DETAILS

- Make :- **BRIDGELUX** **EDISON**

LED DRIVER DETAIL


- Make:- **OSRAM**

APPLICATION

- Commercial
- Residential
- Retail
- Mall Management




Suspending Cable
Length:- 02mtr

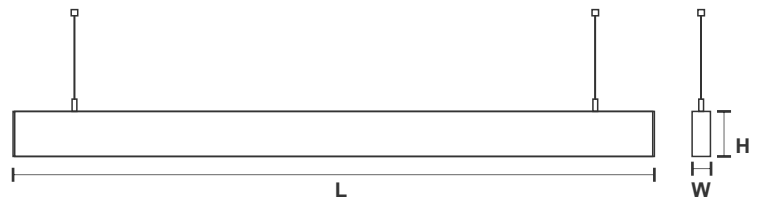

Size

Code	L	W	H
LS-LINEA-2250	1209mm	22mm	25mm
LS-LINEA-2250-LDA	1158mm	22mm	25mm

Model No	Voltage	CCT	Beam Angle	CRI	Wattage	System Efficacy
LS-LINEA-2250	AC 220-240V	3000K/4000K/5700K	120°	80	20W	100lm/W
LS-LINEA-2250-LDA	AC 220-240V	3000K/4000K/5700K	30°/60°	80	18W	100lm/W

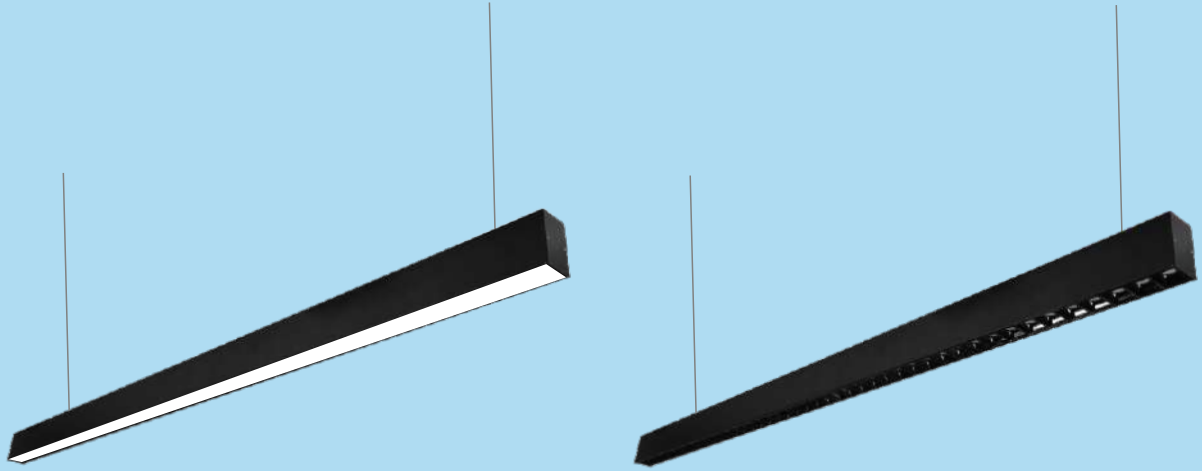

SPECIFICATION

- SMD LED
- Aluminum Extruded Profile
- Constant Current LED Driver
- Best in Class SMD LED For Better High Output And Efficiency
- Opal Diffuser / GR OPTICS LENS / SHINLAND LENS & Wallwasher

LED DETAILS

• Make :- **BRIDGELUX** **EDISON**

LED DRIVER DETAIL

• Make:- **OSRAM**

APPLICATION

- Commercial, Residential, Retail, Mall Management

Size

Code	L	W	H
LS-LINEA-3555	1209mm	35mm	55mm
LS-LINEA-3555-LDA	1195mm	35mm	55mm
LS-LINEA-3555-WW	1195mm	35mm	55mm
LS-LINEA-3555-SL-LDA	1206mm	35mm	55mm
LS-LINEA-3555-SL-WW	1206mm	35mm	55mm
LS-LINEA-3555-GR-LDA	1180mm	35mm	55mm



Dimension	Material	Chips	Typ.FWHM
L:132.5 W:30 H:23.6	PC	3030	15°/30°/45°

Dimension	Material	Chips	Typ.FWHM
L:132.5 W:30 H:26.9	PC	3030	Wallwasher



XTD30-1176-R-50-A

Dimension	Material	Chips	Typ.FWHM
L1176xW30xH20	PC + UV	3030	50°



XTD30-1176-R-50x50

Dimension	Material	Chips	Typ.FWHM
L1176xW30xH20	PC + UV	3030	50°x50°




XTD30-1176-R-50-B

Dimension	Material	Chips	Typ.FWHM
L1176xW30xH20	PC + UV	3030	50°



XTD30-1176-R-35x75

Dimension	Material	Chips	Typ.FWHM
L1176xW30xH20	PC + UV	3030	35°x75°



SL-RF-AE-150A


Dimension	Material	Chips	Typ.FWHM
L:150 W:30 H:21.15	Vacuum Aluminum Plating PC	3030	Wallwasher

Dimension	Material	Chips	Typ.FWHM
L:150 W:30 H:21.15	Vacuum Aluminum Plating PC	3030	48°



Suspending Cable
Length:- 02mtr

Model No	Voltage	CCT	Beam Angle	CRI	Wattage	System Efficacy
LS-LINEA-3555	AC 220-240V	3000K/4000K/5700K	120°	80	20W	100lm/W
LS-LINEA-3555-LDA	AC 220-240V	3000K/4000K/5700K	15°/30°/45°	80	18W	100lm/W
LS-LINEA-3555-WW	AC 220-240V	3000K/4000K/5700K	Wallwasher	80	20W	100lm/W
LS-LINEA-3555-SL-LDA	AC 220-240V	3000K/4000K/5700K	48°	80	18W	100lm/W
LS-LINEA-3555-SL-WW	AC 220-240V	3000K/4000K/5700K	Wallwasher	80	20W	100lm/W
LS-LINEA-3555-GR-LDA	AC 220-240V	3000K/4000K/5700K	50°	80	18W	100lm/W

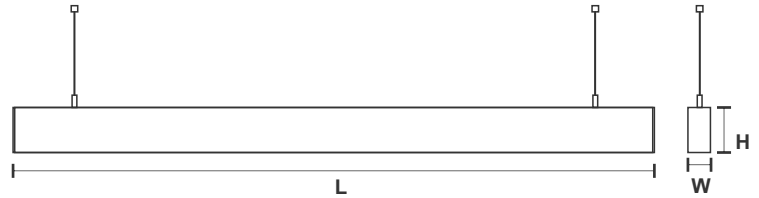

SPECIFICATION

- SMD LED
- Aluminum Extruded Profile
- Constant Current LED Driver
- Best in Class SMD LED For Better High Output And Efficiency
- Opal Diffuser / GR OPTICS LENS / SHINLAND LENS & Wallwasher

LED DETAILS

• Make :- **BRIDGELUX** **EDISON**

LED DRIVER DETAIL


• Make:- **OSRAM**

APPLICATION

- Commercial, Residential, Retail, Mall Management

Size

Code	L	W	H
LS-LINEA-3377	1209mm	35mm	55mm
LS-LINEA-3377-LDA	1195mm	35mm	55mm
LS-LINEA-3377-WW	1195mm	35mm	55mm
LS-LINEA-3377-SL-LDA	1206mm	35mm	55mm
LS-LINEA-3377-SL-WW	1206mm	35mm	55mm
LTS-LINEA-3377-GR-LDA	1180mm	35mm	55mm



Dimension	Material	Chips	Typ.FWHM
L:132.5 W:30 H:23.6	PC	3030	15°/30°/45°

Dimension	Material	Chips	Typ.FWHM
L:132.5 W:30 H:26.9	PC	3030	Wallwasher



XTD30-1176-R-50-A

Dimension	Material	Chips	Typ.FWHM
L:1176xW:30xH:20	PC + UV	3030	50°



XTD30-1176-R-50x50

Dimension	Material	Chips	Typ.FWHM
L:1176xW:30xH:20	PC + UV	3030	50°x50°




XTD30-1176-R-50-B

Dimension	Material	Chips	Typ.FWHM
L:1176xW:30xH:20	PC + UV	3030	50°



XTD30-1176-R-35x75

Dimension	Material	Chips	Typ.FWHM
L:1176xW:30xH:20	PC + UV	3030	35°x75°



SL-RF-AE-150A


Dimension	Material	Chips	Typ.FWHM
L:150 W:30 H:21.15	Vacuum Aluminum Plating PC	3030	Wallwasher

Dimension	Material	Chips	Typ.FWHM
L:150 W:30 H:21.15	Vacuum Aluminum Plating PC	3030	48°



Suspending Cable
Length:- 02mtr

Model No	Voltage	CCT	Beam Angle	CRI	Wattage	System Efficacy
LS-LINEA-3377	AC 220-240V	3000K/4000K/5700K	120°	80	20W	100lm/W
LS-LINEA-3377-LDA	AC 220-240V	3000K/4000K/5700K	15°/30°/45°	80	18W	100lm/W
LS-LINEA-3377-WW	AC 220-240V	3000K/4000K/5700K	Wallwasher	80	20W	100lm/W
LS-LINEA-3377-SL-LDA	AC 220-240V	3000K/4000K/5700K	48°	80	18W	100lm/W
LS-LINEA-3377-SL-WW	AC 220-240V	3000K/4000K/5700K	Wallwasher	80	20W	100lm/W
LS-LINEA-3377-GR-LDA	AC 220-240V	3000K/4000K/5700K	50°	80	18W	100lm/W

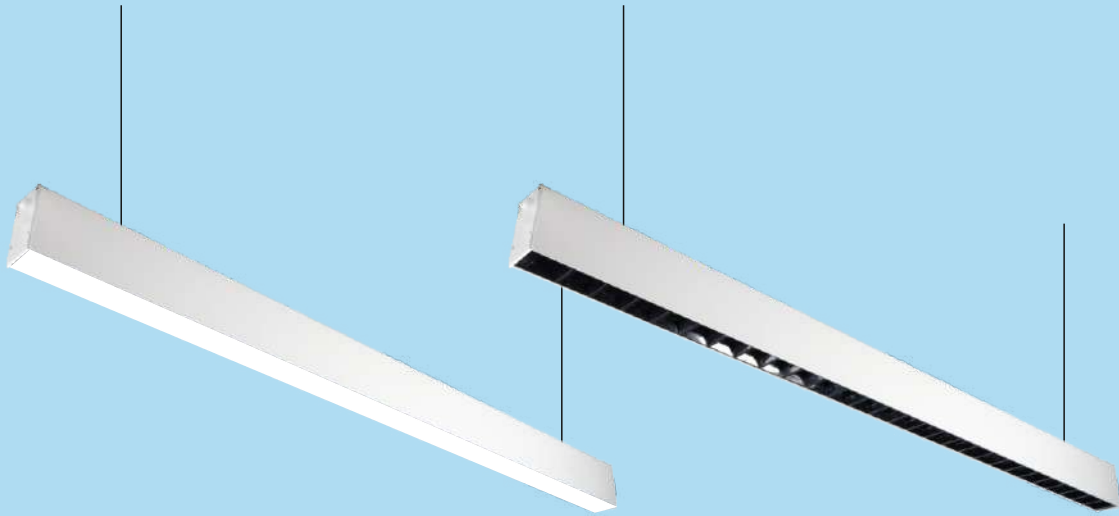

SPECIFICATION

- SMD LED
- Aluminum Extruded Profile
- Constant Current LED Driver
- Best in Class SMD LED For Better High Output And Efficiency
- Opal Diffuser / LEDIL LENS

LED DETAILS


- Make :- **BRIDGELUX** **EDISON**

LED DRIVER DETAIL

- Make:- **OSRAM**

APPLICATION

- Commercial
- Residential
- Retail
- Mall Management

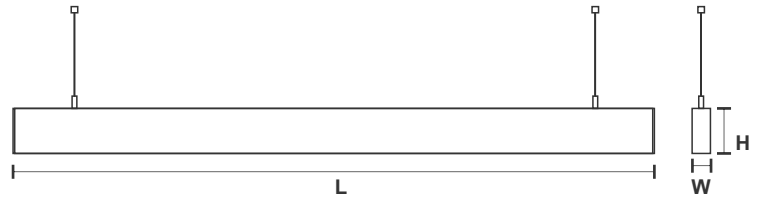

Size

Code	L	W	H
LS-LINEA-4477	1209mm	44mm	77mm
LS-LINEA-4477-LDA	1145mm	44mm	77mm



DAISY-28X1					
Name	H	D	Typ. FWHM	Typ. Eff.	
DAISY-28X1-W	20.2	1140 x 40	50	95	
DAISY-28X1-WW	20.2	1140 x 40	90	95	
DAISY-28X1-W2	20.2	1140 x 40	65	89	

DAISY-4X1					
Name	H	D	Typ. FWHM	Typ. Eff.	
DAISY-4X1-W	20.2	182 x 40	50	95	
DAISY-4X1-WW	20.2	182 x 40	90	95	



Suspending Cable
Length:- 02mtr

Model No	Voltage	CCT	Beam Angle	CRI	Wattage	System Efficacy
LS-LINEA-4477	AC 220-240V	3000K/4000K/5700K	120°	80	28W	100lm/W
LS-LINEA-4477-LDA	AC 220-240V	3000K/4000K/5700K	30°/60°	80	18W	100lm/W



SPECIFICATION

- SMD LED
- Aluminum Extruded Profile
- Constant Current LED Driver
- Best in Class SMD LED For Better High Output And Efficiency
- Opal Diffuser / UGR LENS

LED DETAILS

- Make :- **BRIDGELUX** **EDISON**

LED DRIVER DETAIL


- Make:- **OSRAM**

APPLICATION

- Commercial
- Residential
- Retail
- Mall Management




Suspending Cable
Length:- 02mtr

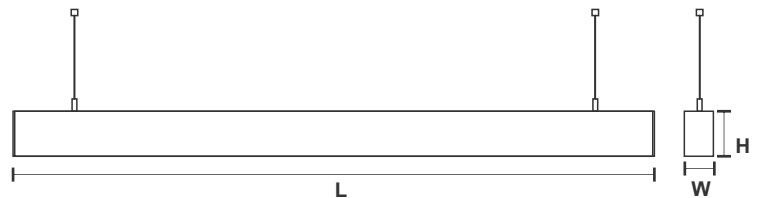


Size

Code	L	W	H
LS-LINEA-5275	1209mm	52mm	75mm
LS-LINEA-5275-LV	1209mm	52mm	75mm
LS-LINEA-5275-HC	1121mm	52mm	75mm
LS-LINEA-5275-LDA	1185mm	52mm	75mm


Model No	Voltage	CCT	Beam Angle	CRI	Wattage	System Efficacy
LS-LINEA-5275	AC 220-240V	3000K/4000K/5700K	120°	80	28W	100lm/W
LS-LINEA-5275-LU	AC 220-240V	3000K/4000K/5700K	120°	80	28W	100lm/W
LS-LINEA-5275-HC	AC 220-240V	3000K/4000K/5700K	120°	80	28W	100lm/W
LS-LINEA-5275-LDA	AC 220-240V	3000K/4000K/5700K	15°/30°/45°	80	18W	100lm/W

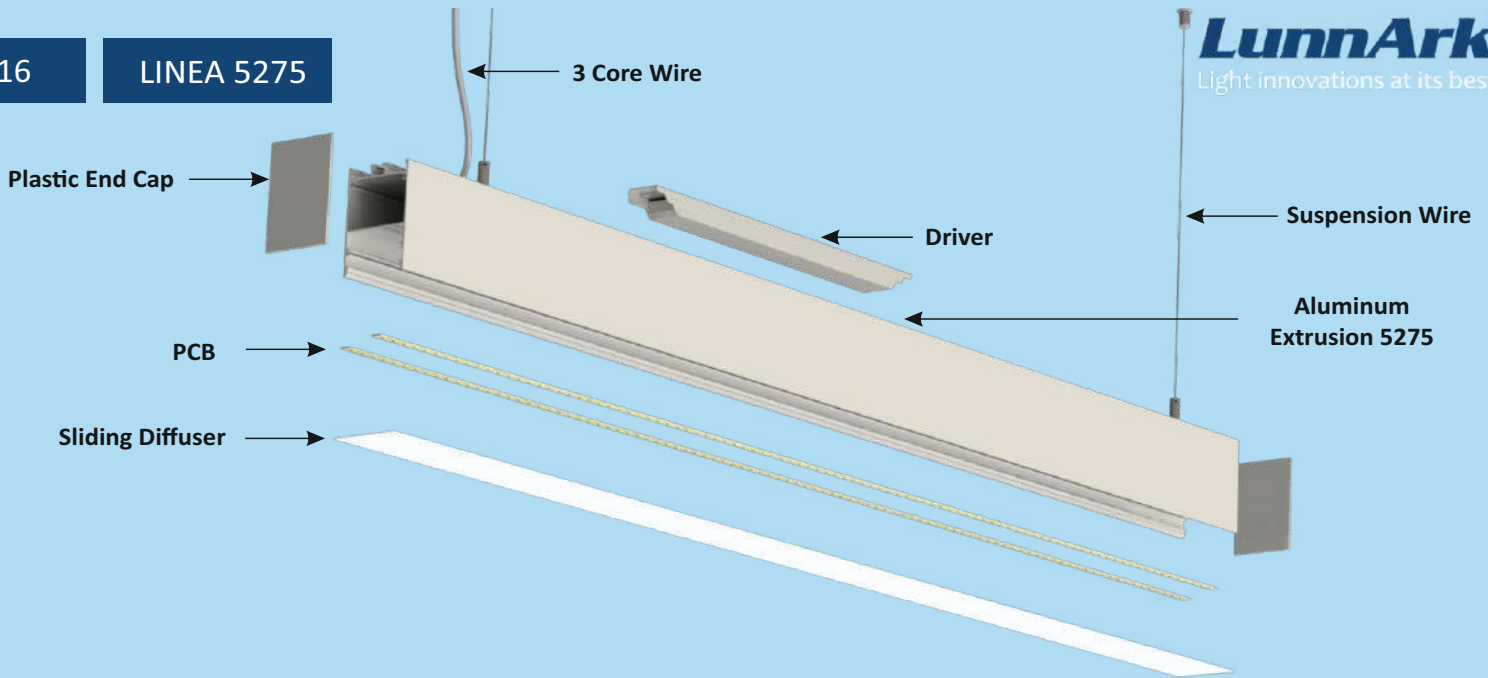

Normal Color

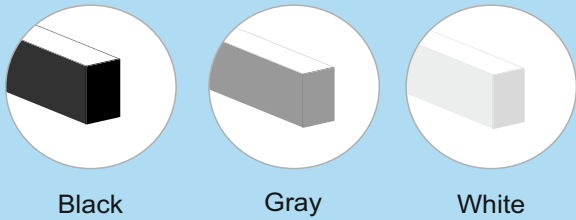

Special Color


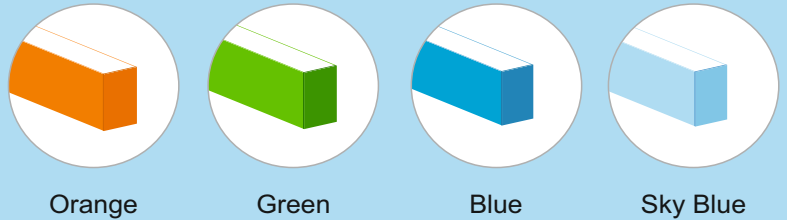


- Aluminum Extrusion 5275
- 1.2mm Sliding Diffuser Mitsubishi
- 6.5mm 28 Micron 1200mm PCB
- Powder Coating :- KRIP ON
- GLS-SPA BIS Approved Isolated driver
- Eng-grade Plastic Screwless Endcap
- Plastic Single packaging
- Plastic 3ply Inner Single pc
- 7ply - Master -12 pcs

- Delivery Free of Cost anywhere in India :- MOQ 480pcs
- Warranty :- 3 Years for Driver (Vasai Location)

Accessories Included :-

- Branding Only For BIS Approved Customer
- 2 Meter 3 Core Wire
- 2 Meter Suspension Wire
- Surface Mounting Slider
- Special Color - ₹50/- Extra (Orange, Green, Blue, Sky Blue, Etc.)
- MOQ :- 3000pcs (One Quarter / 3 Month)
- Taxes Extra

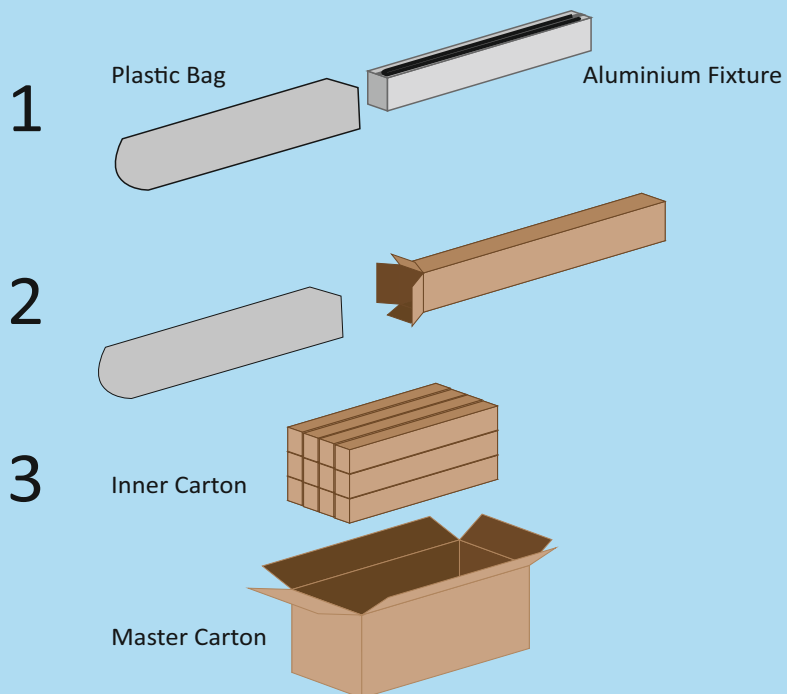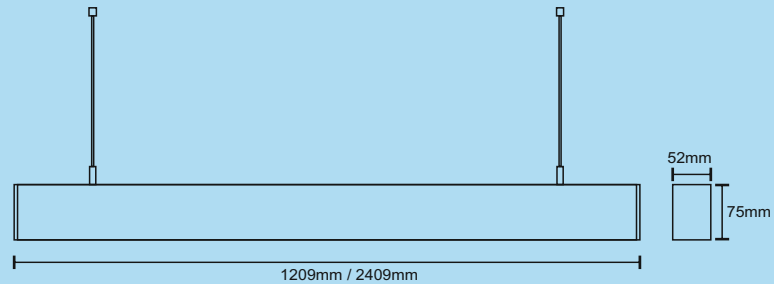

Looking at the great response from our customer we are extending the bonanza scheme on 4ft / 8ft linea 5275 till sept. 2021



SPECIFICATION

- SMD LED
- Aluminum Extruded Profile
- Constant Current LED Driver
- Best in Class SMD LED For Better High Output And Efficiency
- Opal Diffuser

LED DETAILS

- Make :- **BRIDGELUX** **EDISON**

LED DRIVER DETAIL


- Make:- **OSRAM**

APPLICATION

- Commercial
- Residential
- Retail
- Mall Management




Suspending Cable
Length:- 02mtr

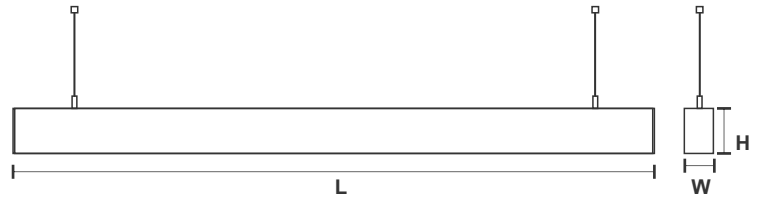

Size

Code	L	W	H
LS-LINEA-7575	1209mm	75mm	75mm

Model No	Voltage	CCT	Beam Angle	CRI	Wattage	System Efficacy
LS-LINEA-7575	AC 220-240V	3000K/4000K/5700K	120°	80	20W	100lm/W

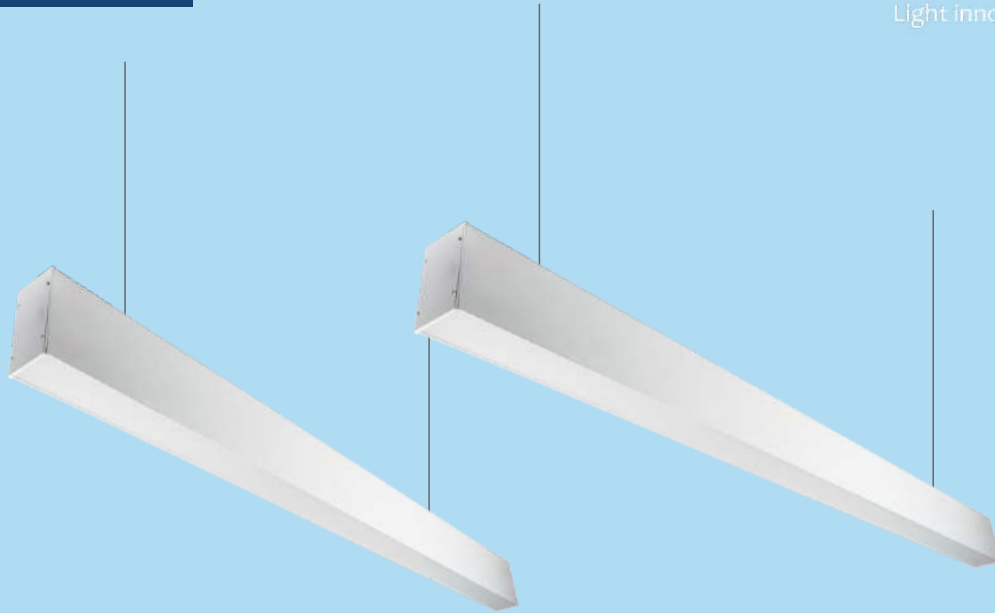

SPECIFICATION

- SMD LED
- Aluminum Extruded Profile
- Constant Current LED Driver
- Best in Class SMD LED For Better High Output And Efficiency
- Opal Diffuser
- Up & Down Linea

LED DETAILS

- Make :- BRIDGELUX EDISON

LED DRIVER DETAIL


- Make:- **OSRAM**

APPLICATION

- Commercial
- Residential
- Retail
- Mall Management



Suspending Cable
Length:- 02mtr

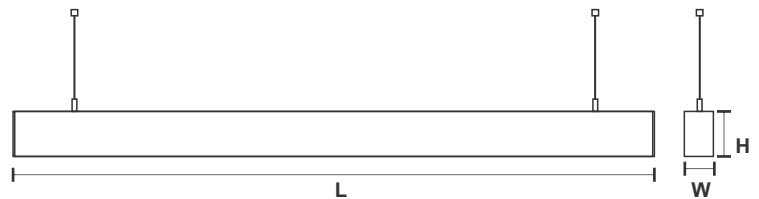

Size

Code	L	W	H
LS-LINEA-52100	1209mm	52mm	100mm
LS-LINEA-75100	1209mm	75mm	100mm

Model No	Voltage	CCT	Beam Angle	CRI	Wattage	System Efficacy
LS-LINEA-52100	AC 220-240V	3000K/4000K/5700K	120°	80	40W	100lm/W
LS-LINEA-75100	AC 220-240V	3000K/4000K/5700K	120°	80	40W	100lm/W



SPECIFICATION

- SMD LED
- Aluminum Extruded Profile
- Constant Current LED Driver
- Best in Class SMD LED For Better High Output And Efficiency
- Opal Diffuser
- Up & Down Linea

LED DETAILS


- Make :- **BRIDGELUX** **EDISON**

LED DRIVER DETAIL

- Make:- **OSRAM**

APPLICATION


- Commercial
- Residential
- Retail
- Mall Management

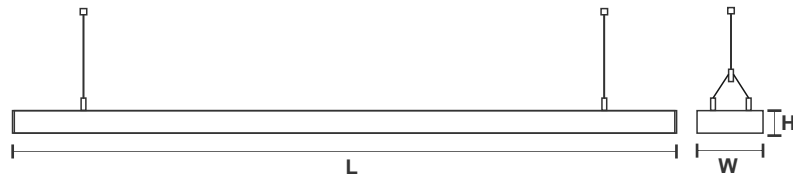

Size

Code	L	W	H
LS-LINEA-14838	1209mm	148mm	38mm

Model No	Voltage	CCT	Beam Angle	CRI	Wattage	System Efficacy
LS-LINEA-14838	AC 220-240V	3000K/4000K/5700K	120°	80	60W	100lm/W

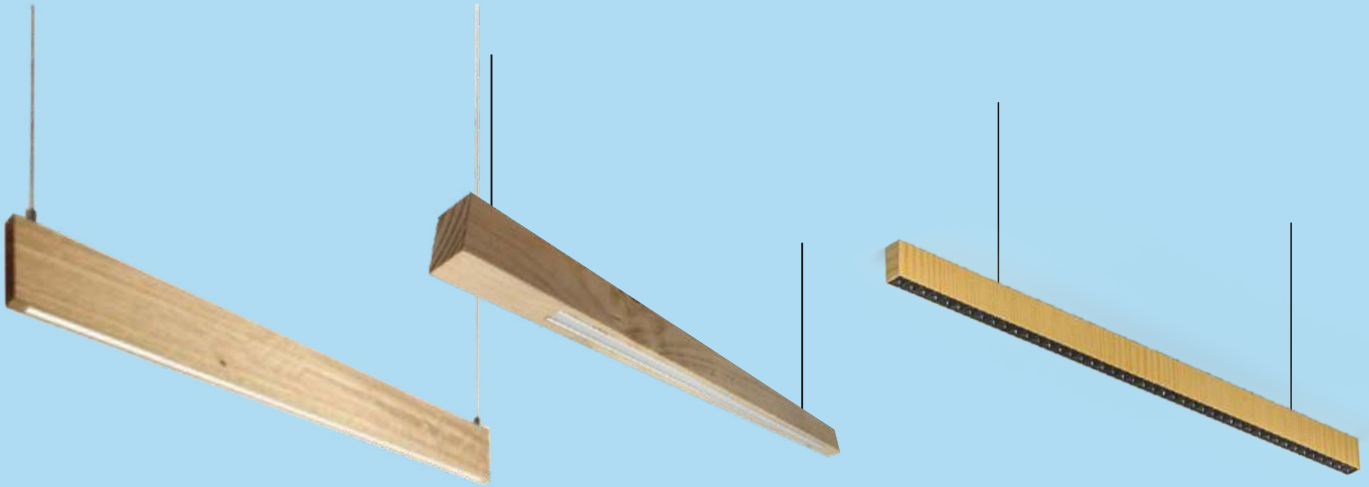

SPECIFICATION

- SMD LED
- WOOD Material
- Constant Current LED Driver
- Best in Class SMD LED Module For Better High Output And Efficiency
- Milky Diffuser.

LED DETAILS


- Make :- BRIDGELUX EDISON

LED DRIVER DETAIL


- Make:- OSRAM

APPLICATION


- Commercial
- Residential
- Retail
- Mall Management

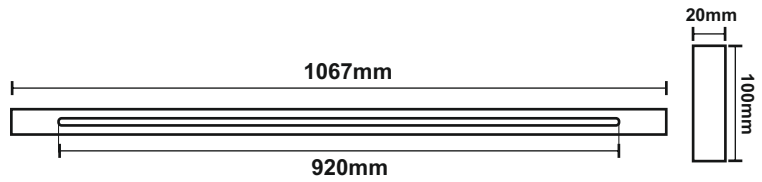

LS-LINEAR-NIRVANA

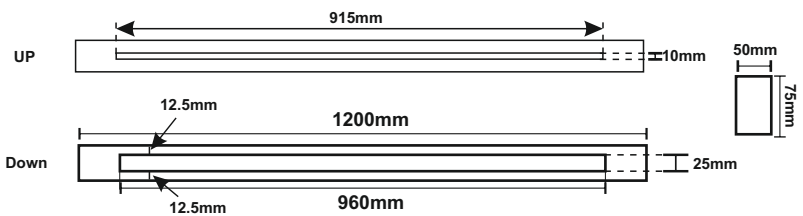

LS-WOOD-5075

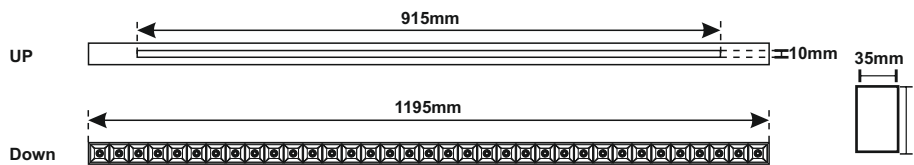

LS-WOOD-3555




All Dimension are in mm, Tolerance ± 2mm



Suspending Cable Length:- 02mtr




Model No	Voltage	CCT	Beam Angle	CRI	Wattage	System Efficacy
LS-LINEAR-NIRVANA	240V	3000K/4000K/5700K	60°	80	10W	90lm/W
LS-WOOD-3555	240V	3000K/4000K/5700K	120°	80	28W / 32W	90lm/W
LS-WOOD-5075	240V	3000K/4000K/5700K	120°	80	28W	90lm/W

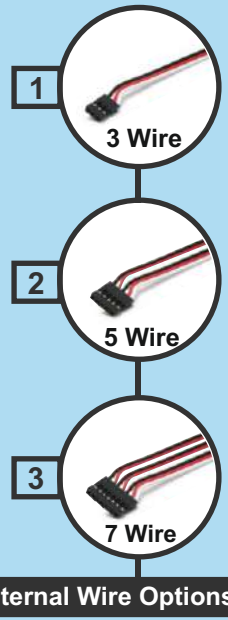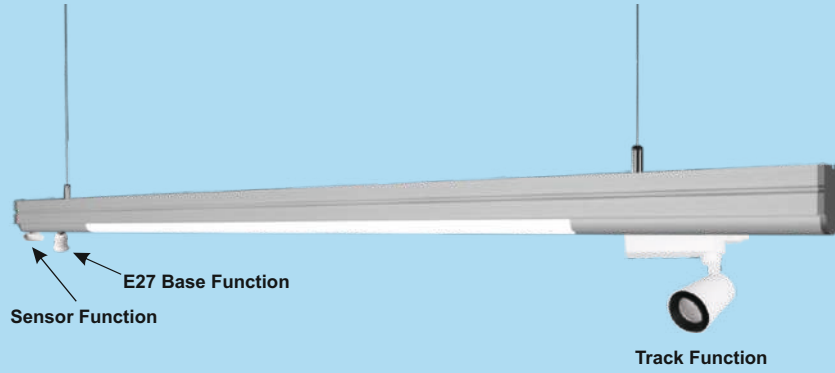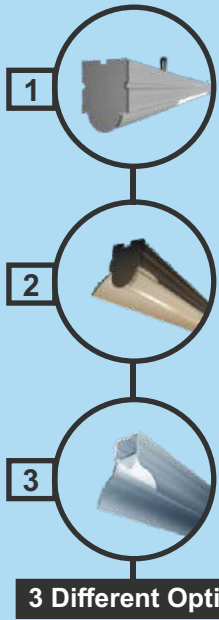


Specification:-

- SMD LED **BRIDGELUX** **EDISON**
- Constant Current LED Driver - **OSRAM**
- Aluminum housing+PC diffuser (BWF-German)
- Available in 3,5 & 7 Wire
- Available in 6 Feet & 12 Feet
- Inter Joint Possible & 10 Fixture Can be Connected in One Connection

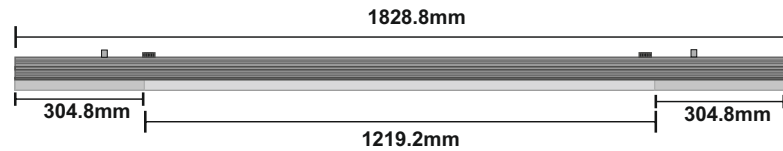


APPLICATION

- Commercial
- Residential
- Retail
- Mall Management



All Dimension are in mm, Tolerance ± 2mm

Model No	Voltage	CCT	Beam Angle	CRI	Wattage	System Efficacy
LS-TRUNKING-ECO	240V	3000K/4000K/5700K	120°	80	40W	110lm/W

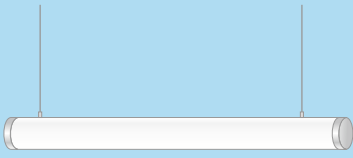

Pendant Light



Wall Light



Floor Light



Wall Movable Light



SPECIFICATION

- SMD LED
- Acrylic Pipe
- Constant Current LED Driver
- Best in Class SMD LED Module For Better High Output And Efficiency
- PC Diffuser.

LED DETAILS





- Make :- **BRIDGELUX** **EDISON**

LED DRIVER DETAIL

- Make:- **OSRAM**

APPLICATION

- Commercial
- Residential
- Retail
- Mall Management



Model No	CCT	CRI	Dimension	Wattage
LS-ROUND0-P-600	2700K/3000K/4000K/5000K	80	2ft x 50mm/75mm/100mm/120mm	8W
LS-ROUND0-P-1200	2700K/3000K/4000K/5000K	80	4ft x 50mm/75mm/100mm/120mm	16W
LS-ROUND0-W-600	2700K/3000K/4000K/5000K	80	2ft x 50mm/75mm/100mm/120mm	8W
LS-ROUND0-W-1200	2700K/3000K/4000K/5000K	80	4ft x 50mm/75mm/100mm/120mm	16W
LS-ROUND0-F-600	2700K/3000K/4000K/5000K	80	2ft x 50mm/75mm/100mm/120mm	8W
LS-ROUND0-F-1200	2700K/3000K/4000K/5000K	80	4ft x 50mm/75mm/100mm/120mm	16W
LS-ROUND0-WM-600	2700K/3000K/4000K/5000K	80	2ft x 50mm/75mm/100mm/120mm	8W
LS-ROUND0-WM-1200	2700K/3000K/4000K/5000K	80	4ft x 50mm/75mm/100mm/120mm	16W