


ESAGONO - SC

Technical Specifications

LunnArk[®]
Light innovations at its best

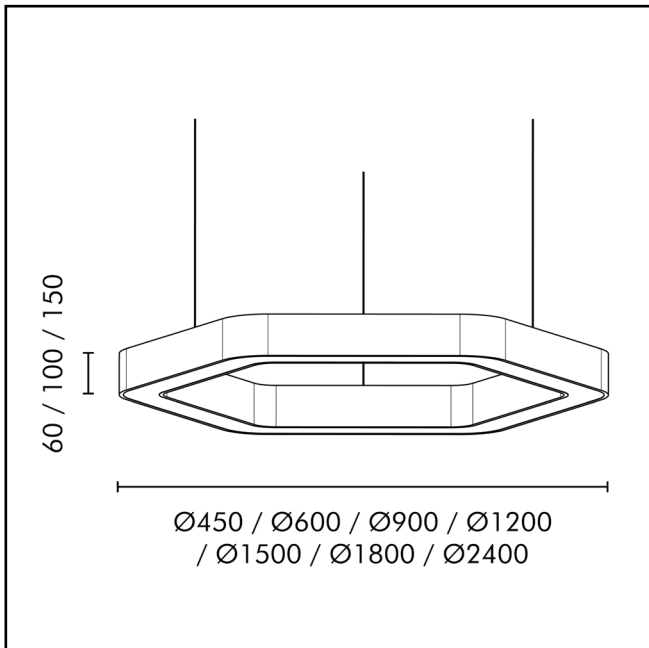

Product Code	GS24
Housing Material	Aluminium
Environment	Indoor
Mounting	Suspended / Recessed / Surface Mounted
Size (Dia)	450 / 600 / 900 / 1200 / 1500 / 1800 / 2400
Wattage	30W / 40W / 60W / 100W / 120W / 150W / 200W
Light Distribution	Direct / Indirect / Direct & Indirect
Body Finish	Powder Coated
Optics	PMMA Diffuser
Driver Mount	Inside Canopy Cup / On Luminaire
Thermal Management	Passive Cooling
Input Voltage	180 - 280 AC 50Hz
Driver Control	Constant Current Driver
Control	Switch / DALI / Analog
Connection	Plug-in Type Pre-wired
Appliance Class	Class 2
Ingress Protection	IP40
Photobiological Safety	RG 0 - No Risk
Ambient Temperature	0 to +50° C
LED	Medium Power LED
Binning	3 Step MacAdam
Luminous Efficacy	95 Lm/W
CCT	2700K / 3000K / 4000K / 5700K / 6500K
CRI	≥80 (Standard) ≥90 (Optional) Tunable LED (Optional)
UGR	<19
LED Life	>50,000 hours

- Specifications are subject to change without notice.
- Images can vary from the original product.
- Colors are based on RAL Standards.

Vtech Biotron Pvt. Ltd.
#84, Anusuya Ashrama, 3rd Main, Magadi Main Road,
Rajajinagar Industrial Town, Bengaluru - 560044, India
Contact: 080 23507469, 1800 890 2146
www.lunnark.com, info@vtechbiotron.com