


FEMKANT - SC

Technical Specifications

LunnArk[®]
Light innovations at its best

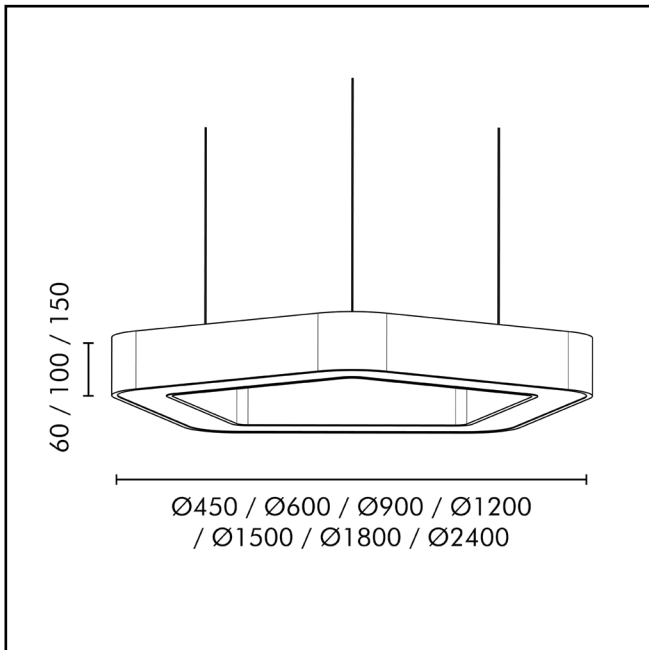

| | |
|------------------------|--|
| Product Code | GS20 |
| Housing Material | Aluminium |
| Environment | Indoor |
| Mounting | Suspended / Recessed / Surface Mounted |
| Size (Dia) | 450 / 600 / 900 / 1200 / 1500 / 1800 / 2400 |
| Wattage | 30W / 40W / 60W / 100W / 120W / 150W / 200W |
| Light Distribution | Direct / Indirect / Direct & Indirect |
| Body Finish | Powder Coated |
| Optics | PMMA Diffuser |
| Driver Mount | Inside Canopy Cup / On Luminaire |
| Thermal Management | Passive Cooling |
| Input Voltage | 180 - 280 AC 50Hz |
| Driver Control | Constant Current Driver |
| Control | Switch / DALI / Analog |
| Connection | Plug-in Type Pre-wired |
| Appliance Class | Class 2 |
| Ingress Protection | IP40 |
| Photobiological Safety | RG 0 - No Risk |
| Ambient Temperature | 0 to +50° C |
| LED | Medium Power LED |
| Binning | 3 Step MacAdam |
| Luminous Efficacy | 95 Lm/W |
| CCT | 2700K / 3000K / 4000K / 5700K / 6500K |
| CRI | ≥80 (Standard) ≥90 (Optional) Tunable LED (Optional) |
| UGR | <19 |
| LED Life | >50,000 hours |

- Specifications are subject to change without notice.
- Images can vary from the original product.
- Colors are based on RAL Standards.

Vtech Biotron Pvt. Ltd.
#84, Anusuya Ashrama, 3rd Main, Magadi Main Road,
Rajajinagar Industrial Town, Bengaluru - 560044, India
Contact: 080 23507469, 1800 890 2146
www.lunnark.com, info@vtechbiotron.com