






Product Code	WD04
Housing Material	Wood
Environment	Indoor
Mounting	Pendant
Size	Ø300 / Ø500
Wattage	10W / 15W
Light Distribution	Direct
Body Finish	Wood Finish
Optics	PMMA Diffuser
Driver Mount	Inside Canopy Cup
Thermal Management	Passive Cooling
Input Voltage	180 - 280 AC 50Hz
Driver Control	Constant Current Driver
Control	Switch / DALI / Analog
Connection	Plug-in Type Pre-wired
Appliance Class	Class 2
Ingress Protection	IP40
Photobiological Safety	RG 0 - No Risk
Ambient Temperature	0 to +50° C
LED	Medium Power LED / LED bulb
Binning	3 Step MacAdam
Luminous Efficacy	95 Lm/W
ССТ	2700K/3000K/4000K/ 5700K/6500K
CRI	≥80 (Standard) ≥90 (Optional) Tunable LED (Optional)
UGR	<19
LED Life	>50,000 hours

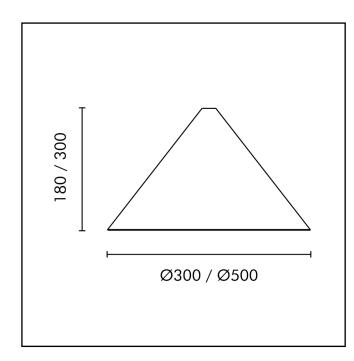

Vtech Biotron Pvt. Ltd. #84, Anusuya Ashrama, 3rd Main, Magadi Main Road, Rajajinagar Industrial Town, Bengaluru - 560044, India Contact: 080 23507469, 1800 890 2146 www.lunnark.com, info@vtechbiotron.com

Specifications are subject to change without notice.
Images can vary from the original product.
Colors are based on RAL Standards.